
## USB Keyboard

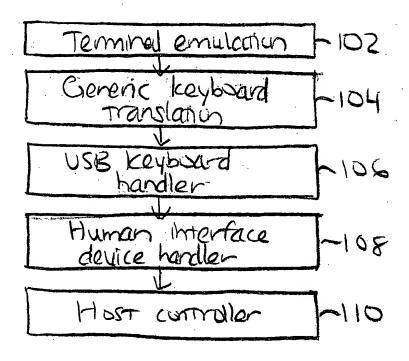

FIGH

## PS12 Keyboard


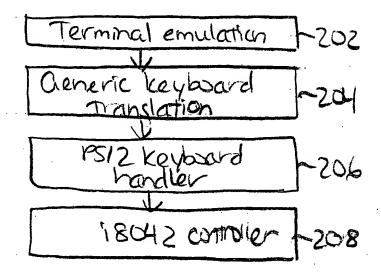


FIG. 2

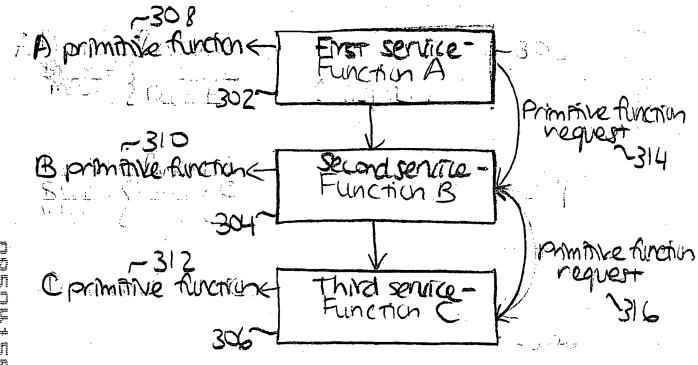

FIG, BA


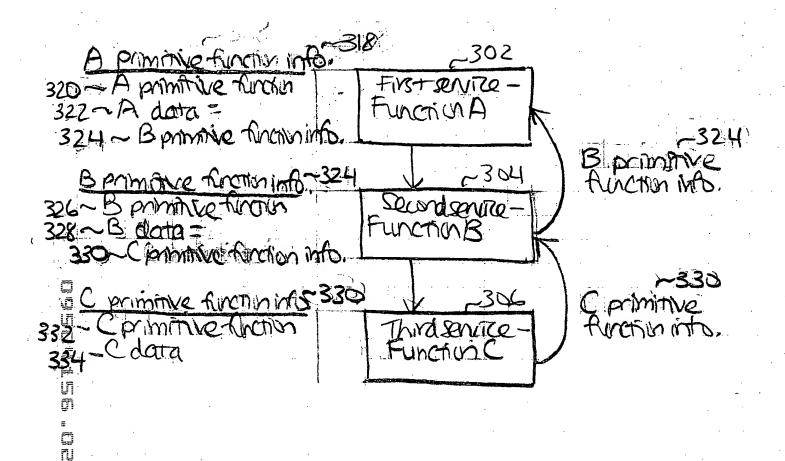


FIG. 3B

FIG. H,

110.3

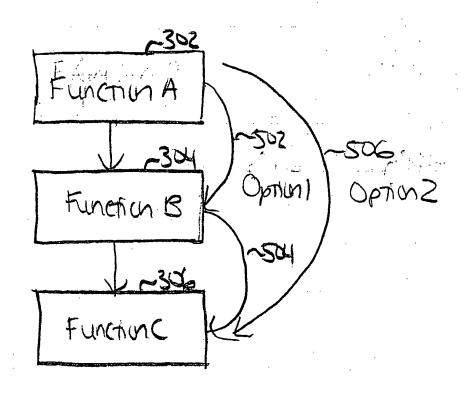

F1Q.5.

Obtain network stack representing a set of services e,g.,I/O/debu primitive function region to top layer of the Perwork strack Sand primarile function request from current level in the strick to lower level in the Stack Ose a more loner evels send primitive function informations to one or more upper levels in the stack (eq. those that contribute to debucqui

System graff up

FIG.6

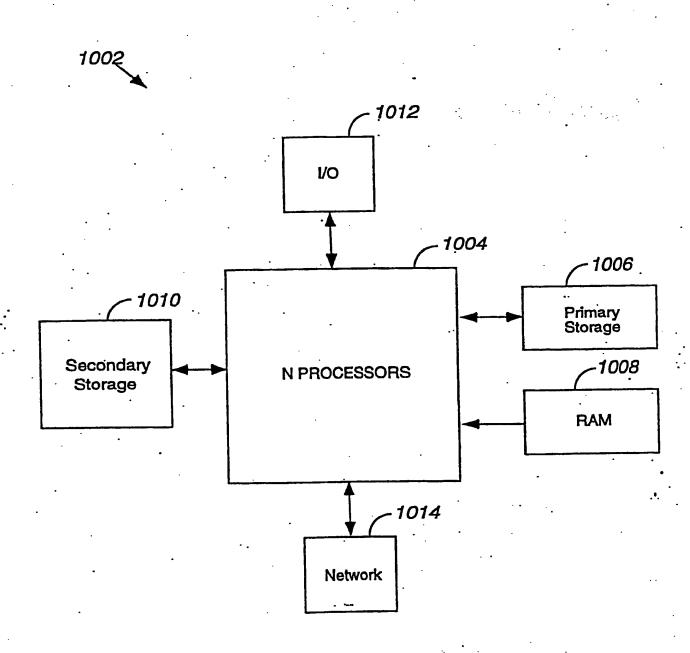


Figure 7